


Fix Me! Эта страница пока что не переведена полностью. Пожалуйста, помогите завершить перевод.

(Сотрите это сообщение по окончании перевода.)

Deny rule

Rule creation

In order to block user access to host in the Internet or deny access via any particular port the Deny rule is necessary. Proceed to users and groups page which supposed to be blocked access, open «Rules and Restrictions» followed by «Add→Deny rule».

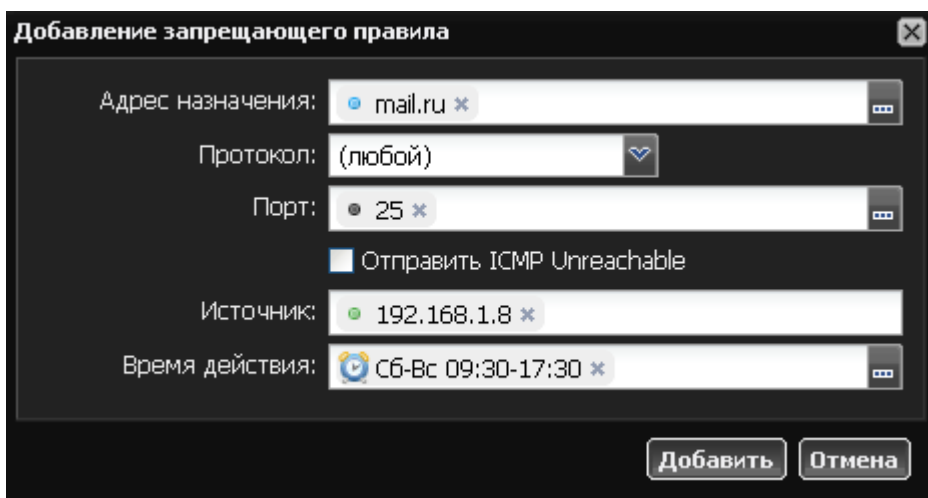

Добавление запрещающего правила

Адрес назначения: mail.ru ×

Протокол: (любой) ▾

Порт: 25 ×

Отправить ICMP Unreachable

Источник: 192.168.1.8 ×

Время действия: Сб-Вс 09:30-17:30 ×

Добавить Отмена

During creation of deny rule it is possible to specify destination address, destination port and connection protocol. Destination address could be a host-name as well as IP address or IP-range with prefix or range type of xx.xx.xx.xx-yy.yy.yy.yy. If user is assigned with several IP addresses you can specify addresses for which rule will apply in «Source field». You may wish to specify a time duration for a rule.

The screenshot shows a web interface for configuring network rules. At the top, there are tabs for 'Состояние', 'Ир-адреса', 'Правила и ограничения', 'Статистика', and 'События'. Below the tabs is a toolbar with buttons for '+ Добавить', '- Удалить', 'Операции', 'Редактировать', and 'Поиск правил'. The main content area is divided into two sections: 'Правила' and 'Профили'. Under 'Правила', there is a rule titled 'Запретить доступ на сервер mail.ru на порт smtp по протоколу TCP' with a red stop sign icon. Below the title, it says 'Запрещающее правило' and 'Время действия: Сб-Вс,09:30-17:30'. There are three buttons: 'Редактировать', 'Удалить', and 'Выключить'. Under 'Профили', there is a profile titled 'Профиль для администраторов' with a blue profile icon.

Warning! This rule will filter traffic on IP protocol rule level and cannot do URL-based filtration. For URL-based filtration [Proxy deny rule](#) is used.

For exception creation of deny rule [Allow rule](#) is used.


How to deny port-range

You can specify a range of ports using «-» as well as list of ports using comma - «,» or space-bar «- ».

Example: 21,22,1100-1200.

Layer-7 filtering

Apart from standard transport protocols (TCP and UDP) ICS can filter application-level protocols. Currently OSCAR (ICQ) and p2p (torrent) protocols are supported.

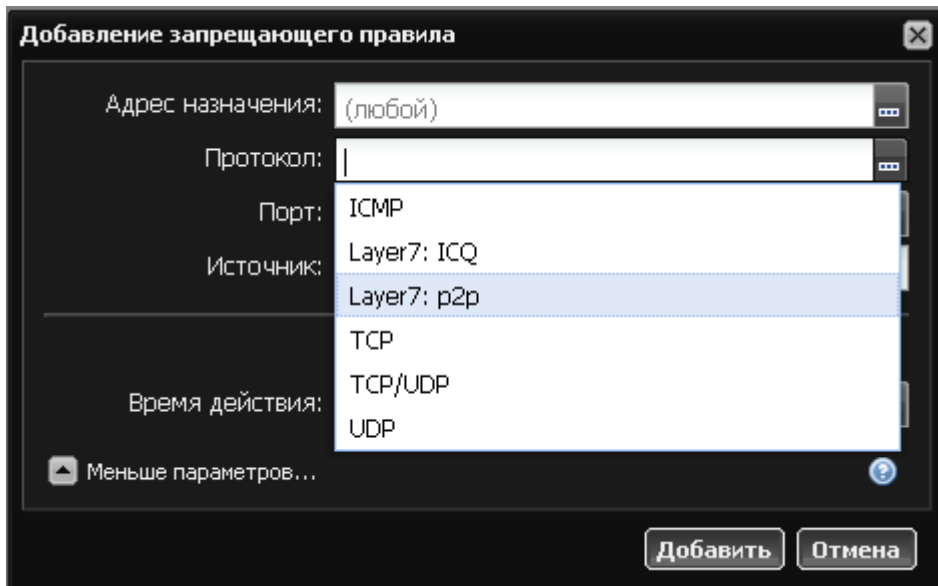

Using this rule you may completely block usage of peer-to-peer protocols and clean-up your Internet channel from torrent traffic.

From: <https://doc-old.a-real.ru/> - Документация

Permanent link: https://doc-old.a-real.ru/doku.php?id=en:%D0%B7%D0%80%D0%BF%D1%80%D0%85%D1%89%D0%80%D1%8E%D1%89%D0%85%D0%B5_%D0%BF%D1%80%D0%B0%D0%B2%D0%B8%D0%BB%D0%BE

Last update: 2020/01/27 16:28

